

ZXT

BATTERY POWERED STRAPPING TOOL

ZXT12

for use with 12mm polyester (PET/PP) material

ZXT16

for use with 16mm polyester (PET/PP) material

ZXT19

for use with 19mm polyester (PET/PP) material



Features include:

- > Patented brushless single motor design for extremely long service life.
- > New 18V 4000mAh high-capacity battery for increased productivity.
- > ZXT19 has a tension range of up to 400kg.
- > Patented strap gripper design for improved tension.
- > Single handed operation.
- > Soft mode for light or fragile packages.
- > Lightest model in its class (3.5Kg including battery).
- > Digital touch panel pre-programmed for different applications.
- > Suitable for PP* and polyester strapping.
- > Extremely simple strap feed, with both straps being inserted together.
- > Strap is tensioned, sealed and cut in one operation.



Suitable for use with polypropylene strapping



Heat weld seal - no need for metal seals



Battery powered



Suitable for carton strapping applications



Suitable for brick/concrete industry applications



Suitable for use with polyester strapping



Strapping tension range



Suitable for timber industry applications



Suitable for engineering industry applications



Total machine weight



ZXTBAT-R


Replacement 18V Li-ion Battery for ZXT12, ZXT16 and ZXT19 Tools



Specifications

Machine Weight:	3.5 kg
Machine Dims:	330 x 150 x 125 w x d x h (mm)
Strap Widths (mm):	12, 16, 19, (9mm on request)
Min/Max PP Thickness:	0.7mm - 1.27mm
Min/Max PET Thickness:	0.4mm - 1.27mm
Min/Max Tension:	200-400 kg (Strap/Model Dependent)
Speed/Cycle:	3.5 secs (@50Hz if applicable)
Power Requirement:	100-240v 50-60Hz
Power Consumption:	140w
Cycles per Charge:	up to 440
Charge Time:	30 mins

*Please note that the number of strapping cycles obtained from a full battery will vary depending on quality and specification of strap, length of slack taken up during tensioning, strap tension and sealing time settings, ambient conditions and operator technique.

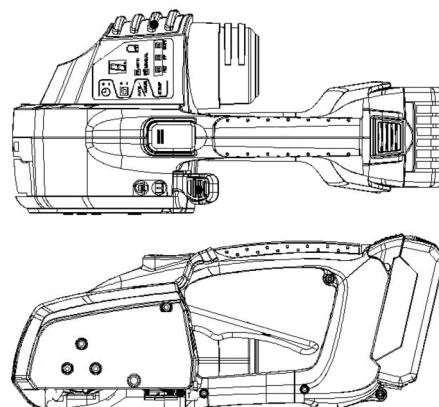

TVX

BATTERY POWERED STRAPPING TOOL

TVX12-Li

for use with 12mm polyester (PET/PP) material

TVX16-Li

for use with 16mm polyester (PET/PP) material



VIDEO



Features

The TVX Li-ion battery powered tool is one of the fastest on the market - in less than three seconds, the strap is tensioned, sealed and cut.

The ergonomic and rugged design assists maximum operator comfort, with minimal effort. Packages such as boxes, pallets, bales and crates can be safely strapped. Strap feeding is extremely simple, with both straps being inserted together.

The TVX has an exceptional tension range and applies up to 240kg (2400N) with ease. The flexible sealing mode allows you to choose from semi-automatic or single button fully automatic operation.



TVXBAT-Li
Replacement Battery





TVXBC-Li
TVX Charger

PP Suitable for use with polypropylene strapping


 Heat weld seal - no need for metal seals

 Battery powered

 Suitable for carton strapping applications


 Suitable for brick/concrete industry applications

PET Suitable for use with polyester strapping

 240Kg Strapping tension range

 Suitable for timber industry applications

 Suitable for engineering industry applications

 4.5Kg Total machine weight

Specifications

Machine Weight:	4.5 kg
Machine Dims:	350 x 157 x 160 w x d x h (mm)
Strap Widths (mm):	12, 16
Min/Max PP Thickness:	0.6mm - 1.05mm
Min/Max PET Thickness:	0.5mm - 1.05mm
Min/Max Tension:	15-240 kg (Strap Dependent)
Speed/Cycle:	3 secs (@50Hz if applicable)
Power Requirement:	100-240v 50-60Hz
Power Consumption:	140w
Cycles per Charge:	up to 400
Charge Time:	30 mins

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimax.eu.com

©Copyright Optimax 2016
We reserve the right to change product specifications without prior notice
Re-order Code: LIT-PS020
Optimax® is a registered trademark of Packaging Brands Ltd.